


CONSTANT CLIMATE CHAMBERS HPPECO

according to DIN 12880:2007-05; EN 61010-1 (IEC 61010-1); EN 61010-2-010

Standard units are safety-approved and bear the test marks:



- Interior:** stainless steel, mat. 1.4301 (ASTM 304), deepdrawn
- Housing:** textured stainless steel 1.4016 (ASTM 430), rear zinc-plated steel 1.0037 (St37-2), intuitively operated TwinDISPLAY (TFT colour display) with touchscreen
- Door:** Sizes 110 to 1060: fully insulated stainless steel doors with 2-point locking (compression door lock) and inner glass door, Sizes 1400 and 2200: stainless steel doors with glass sectors, fully heated inner glass panes integrated in the full-sight glass door with 2-point locking (compression door lock), sizes 750, 1060 and 1400 two leaves, size 2200 three leaves
- Connection:** mains cable with plug (German type)
- Installation:** Sizes 110 and 260: 4 adjustable appliance feet, Sizes 410 to 1060: on lockable castors, Sizes 1400 and 2200: on height-adjustable and lockable castors
- Interfaces:**

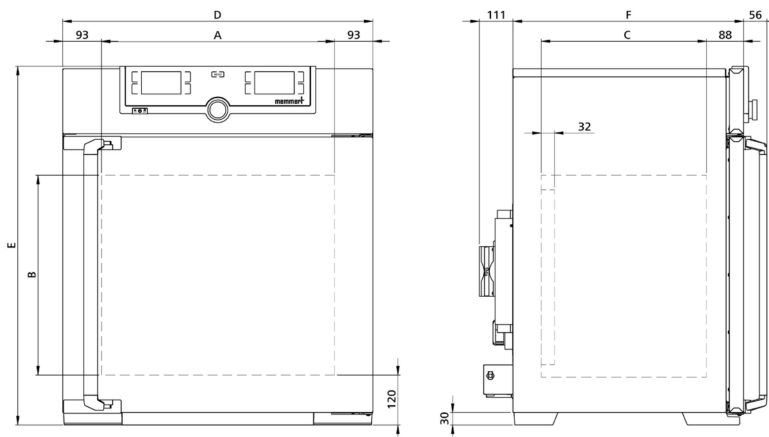

Model sizes/Description				110	260	410	750	1060	1400	2200
Stainless steel interior	Volume	l		108	256	384	749	1060	1360	2140
	Width	(A)	mm	560	640		1040		1250	1972
	Height	(B)	mm	480	800	1200			1450	
	Depth (less 32 mm for fan - Peltier)	(C)	mm	400	500		600	850	750	
	Max. number of grids/shelves	number		5	9	14			28	42
	Max. loading per grid/shelf	kg		20			30	60	30	
	Max. loading of chamber	kg		150	200				250	330
	Max. loading per slide-in drip tray	kg		3	4		8		-	
	Max. loading per bottom drip tray	kg		3	4		8		-	
Textured stainless steel exterior	Width	(D)	mm	745	824		1224		1435	2157
	Height (sizes 410, 750, 1060, 1400 and 2200 with castors)	(E)	mm	864	1183	1720			1913	
	Depth (without door handle, depth of handle +56 mm, +111 mm Peltier element)	(F)	mm	555	655		755	1005	905	
Standard equipment	Standard works calibration certificate (measuring point chamber center)	°C	+25 °C / 60 % rh, +40 °C / 75 % rh							
	Stainless steel grid, electropolished	number	2						4	6
	Water tank including connection hose		●							
Temperature	Working temperature range without light, without humidity	°C	0 (at least 20 below ambient temperature) up to +70							
	Working temperature range without light, with humidity	°C	+5 (at least 20 below ambient temperature) up to +70						+15 (at least 10 below ambient temperature) up to +60	
	Working temperature range with light, without or with humidity	°C	+15 to +40				-			
	Setting temperature range without light, with humidity	°C	+5 to +70						+15 to +60	
	Setting temperature range with light, with humidity	°C	+5 to +70				-			
	Setting temperature range with light, without humidity	°C	0 to +70				-			
	Setting temperature range without light, without humidity	°C	0 to +70							
	Setting accuracy	°C	0.1							
Humidity	Setting range humidity without light	% rh	10 to 90						10 to 80	
	Setting range humidity with light	% rh	10 to 90				-			
	Setting accuracy	% rh	0.5							

Model sizes/Description			110	260	410	750	1060	1400	2200
Further data	Electrical load at 230 V, 50/60 Hz	W	420	700		1400			2000
	Electrical load at 115 V, 50/60 Hz	W	420	700		1400			-
	Peltier elements in the rear	number	1	2		4			6
Packing data	Net weight	kg	64	101	142	213	259	347	474
	Gross weight (packed in carton)	kg	87	140	192	279	339	525	718
	Width	mm	830	930		1330	1370	1560	2300
	Height	mm	1050	1380	1930	1910	1970	2200	
	Depth	mm	800	930		1050	1300	1190	
Order No. Constant Climate Chambers			HPP110eco	HPP260eco	HPP410eco	HPP750eco	HPP1060eco	HPP1400eco	HPP2200eco

Options		110	260	410	750	1060	1400	2200
Temperature restriction; Temperature: +60 °C		A8					-	
Chamber modification for the application of reinforced perforated stainless steel shelves or stainless steel grids (bearing rails mounted in the working chamber - standard with 1060) - includes replacement of standard grids by reinforced grids		-			K1	-		
Light module cold white 6,500 K: LED light strips arranged on the side walls of the interior, 10 for model 110, 14 for model 260/410/750, programme controlled dimming from 0 to 100 % (in 1 % steps), ramp programming in combination with temperature and humidity		T7				-		
Light module cold white 6,500 K + warm white 2,700 K: LED light strips - 10 strips for model 110, 14 for model 260/410/750 - (5 resp. 7 alternating cold white light strips and 5 resp. 7 warm white light strips) on the side walls of the interior, programme-controlled dimming from 0 to 100 % (in 1 % steps), ramp programming in combination with temperature and humidity		T8				-		
Light module warm white 2,700 K: light strips arranged on the side walls of the interior, 10 strips for model 110, 14 for model 260/410/750, programme-controlled dimming from 0 to 100 % (in 1 % steps), ramp programming in combination with temperature and humidity		T9				-		
Interior socket (can only be ordered with limited temperature range - max. +60 °C), ampacity 230 V / 2,2A / 500W, can be switched off with the On/Off switch, cannot be switched individually, moisture tight IP68 (requires option A8 against surcharge) (max. one per appliance)		R3					-	
Entry port with 23 mm clear diameter, can be closed, standard position (F0 and F2 not for model size 260 with light module; F0 - F3 not for model size 110 with light module)	left centre/centre	F0			-			
	left centre/top	F1			-			
	right centre/centre	F2			-			
	right centre/top	F3			-			
Entry port with 23 mm clear diameter, can be closed, individual position (please state position)	left	F4						
	right	F5						
	rear	F6					-	
Entry port (silicone), 40 mm clear diameter, moisture tight, can be closed by silicone stopper, at the back (please state location)		F7					-	
Entry port (silicone), 40 mm clear diameter, moisture tight, can be closed by silicone stopper, standard position rear		D8						
4 - 20 mA current loop interface	Temperature controller actual value (-10 to +80 °C = 4 - 20 mA)	V3						
Compressed air dehumidification (efficient dehumidification of the interior by means of compressed air). Standard works calibration certificate (measuring point chamber centre) at +10 °C with 10 % rh		C9					-	
Door with lock and key (safety lock)	One lock	B6					-	
	Two locks (one each door)	-					B62	-
	Three locks (one each door)	-					B63	
Potential-free contact for combination error message (e.g. supply failure, sensor fault, fuse)		H6						
Process-dependent programmable door lock	One	D4					-	
	Two (one each door)	-					D42	-
	Three (one each door)	-					D43	
Door-open-recognition	One	V5					-	
	Two (one each door)	-					V52	-
	Three (one each door)	-					V53	
MobileALERT, notification by SMS in case of any error or alarm of the device (requires option H6)		C3						
MobileALERT for 2 alarm notifications; notification by SMS. temperature and humidity alarm (requires option H6)		C4						
Castor frame (2-part), height 140 mm		R9			-			
Accessories		110	260	410	750	1060	1400	2200

Accessories			110	260	410	750	1060	1400	2200
Stainless steel grid, electropolished			E20165	E28891		E20182	B41251	B38955	

Accessories	110	260	410	750	1060	1400	2200
Reinforced stainless steel grid, electropolished, max. loading 60 kg; size 750 with guide bars and fixing screws (requires option K1). Please consider max. loading of chamber	E29767	E29766		B32190	B32550	-	
Perforated stainless steel shelf	B00325	B29725		B00328	-		
Reinforced stainless steel shelf, max. loading 60 kg; with guide bars and fixing screws (requires option K1). Please consider max. loading of chamber	-			B32191	B32549	-	
Stainless steel slide-in drip tray, 15 mm rim, with guide bars and fixing screws (may affect the temperature distribution, requires option K1)	-			B32763	-		
Stainless steel slide-in drip tray, 15 mm rim (may affect the temperature distribution, not in connection with option K1 for sizes 450/750)	E02073	B29726		E02075	B32599	-	
Stainless steel bottom drip tray, 15 mm rim (may affect the temperature distribution, requires option K1)	-			B34055	-		
Stainless steel bottom drip tray, 15 mm rim (may affect the temperature distribution, not in connection with option K1 for sizes 450/750)	B04359	B29722		B04362	B29769	-	
Holder for water tank (sizes 110 - 750: 2.5 litres, sizes 1060/1400/2200: 10 litres) for mounting on the rear of the appliance. Standard equipment for sizes 410, 750, 1060, 1400 and 2200	B49092			-			
Central water supply with filter cartridges for connection to the domestic water supply. Product information on demand	ZWVR6						
Central water supply without filter cartridges for connection to the domestic water supply (only for demineralised water with a conductivity of 5 to 10 µS/cm and a pH value between 5 and 7). Product information on demand	ZWVR7						
Flush-fit unit (stainless steel frame covering gap between oven and wall opening), with air slots	B29734	B29738	B42116	B29742		-	
Flush-fit unit (stainless steel frame covering gap between oven and wall opening), without air slots	B29735	B29739	B42117	B29743		-	
Stacking set (4 pcs) for stacking of appliances of same size	B29744	-					
Set of height adjustable feet (4 pcs)	B29768			-			
Subframe, adjustable in height (height 500 mm)	B29749	B29751	-				
Subframe, on castors (height 560 mm)	B29750	-					
Subframe, adjustable in height, height 130 mm	B33661	B33664	-				
External measuring instrument with sensors for daylight and UV-light. Product information on demand	B04713				-		
External measuring instrument with additional measuring head for temperature and humidity measurement. Product information on demand	B04714						

Accessories Software and Connectivity	110	260	410	750	1060	1400	2200
Software conforming to FDA AtmoCONTROL. Meets the requirements for the use of electronically stored data sets and electronic signatures as laid down in Regulation 21 CFR Part 11 of the US Food and Drug Administration (FDA). Respective IQ/OQ documents available in German and English language (without surcharge)	FDAQ1						
Integration of additional units (up to max. 31 units) into an already existent FDA-software licence	FDAQ2						
USB User-ID stick (with User-ID licence): Oven-linked authorisation licence (User-ID-programme) on Memory-stick, prevents undesired manipulation by unauthorised third parties. When reordering please specify serial number	B33170						
Ethernet connection cable 5 m for computer interface	E06189						
USB-Ethernet adapter	E06192						